
- HONDA -	Accessory MOONROOF VISOR	Application	Publications No. All 39409-39688
INSTRUCTIONS	P/N 08R01-SZA-100	2009 PILOT	Issue Date JUNE 2008
PARTS LIST		FOOLS AND SUPPLIES REG	QUIRED
Moonroof visor	I	Phillips screwdriver	
\sim		10 mm Combination wrench	
		Scale	
		sopropyl alcohol Shop towels	
		Masking tape	
2 Brackets A		Small phillips screwdriver	
		Forque screwdriver: T/N CDI4	01SM
		Illustration of the Moonroof Visor on the Vehicle	
	ð	MOONROOF VISOR	\sim
2 Brackets B			
4 Screws			
4 Nuts			
Protection films		NSTALLATION	
Sealer		Customer Information: The installation instruction is intertechnicians who have the protraining to correctly and safely vehicle. These procedures sl "do-it-yourselfers."	nded for use only by skilled oper tools, equipment, and y add equipment to your
¢		vehicle.	

- Install the accessory using the specified bolts and screws. Use of unspecified bolts/screws may cause damage to the vehicle.
- Wash and wax the area to be covered with a high-quality paste wax.


Installing the Moonroof Visor

1. Open the moonroof glass as shown.

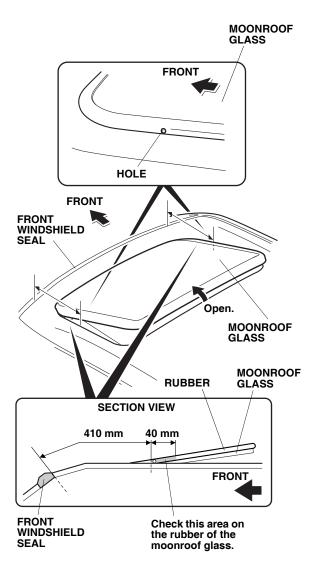


2. Measure and check the area on the rubber of the moonroof glass on the left and right side of the vehicle. If a hole is located on the rubber of the moonroof glass in the area shown, go to step 3; if not, go to step 5.

3. Using a small phillips screwdriver, insert the sealer towards the rear side of the hole as shown.

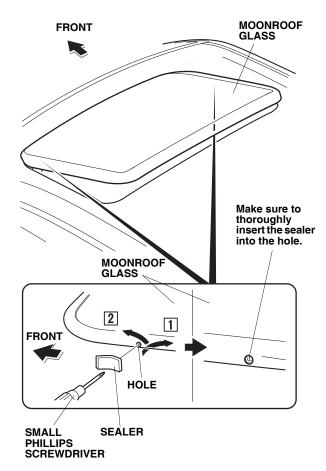


4. Insert the rest of the sealer towards the front of the hole as shown. Make sure to thoroughly insert the sealer into the hole.

5. Open the moonroof.

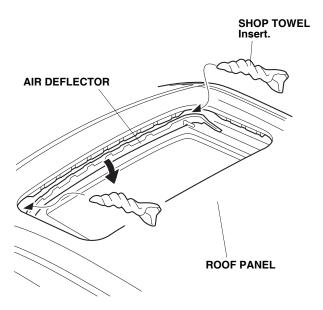


6. Roll up two shop towels and insert them between the roof panel and air deflector to lower the air deflector. Do not to damage the air deflector.

7. Using isopropyl alcohol on a shop towel, thoroughly clean the areas where the protection films will attach.

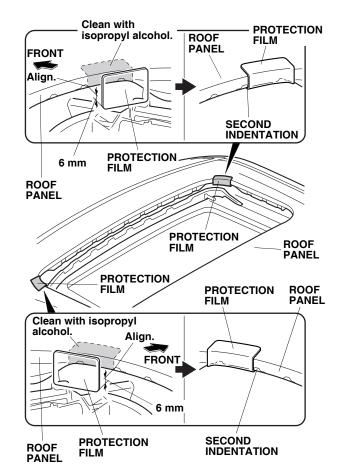


8. Remove the adhesive backings from the protection film. Starting from the bottom edge of the protection film, wrap 6 mm of the protection film around the lip of the roof panel opening and align it with the second indentation on the left side of the roof panel as shown; continue upward with the protection film around the top of the roof panel. Repeat the same procedure for the right side of the roof panel.

9. Using isopropyl alcohol on a shop towel, thoroughly clean the areas where the protection films will attach.

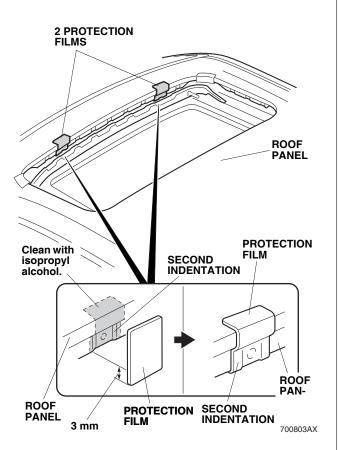


10. Remove the adhesive backings from the protection film. Starting from the bottom edge of the protection film, wrap 3 mm of the protection film around the lip of the roof panel opening to cover the second indentation on the left side of the roof panel; continue upward with the protection film around the top of the roof panel. Repeat the same procedure for the right side of the roof panel.

11. Place two brackets B over the protection films attached in step 8 and secure it with the masking tapes as shown.

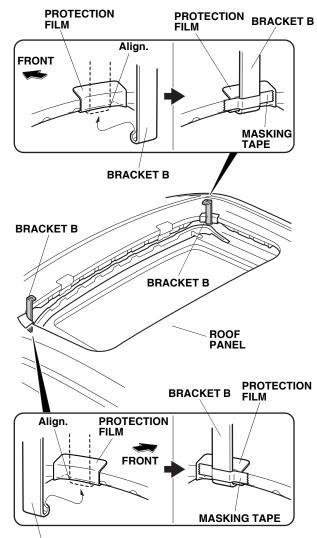


BRACKET B


12. Place two brackets A over the protection films attached in step 10 and secure it with the masking tapes as shown.

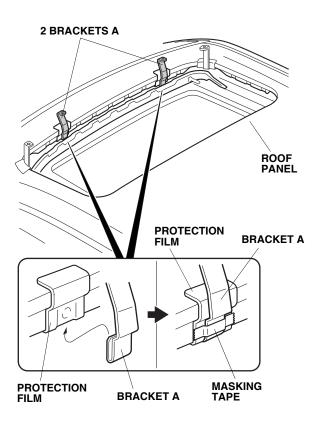

13. Align the holes on the moonroof visor with the holes on the brackets A and B. Secure the moonroof visor with four screws and four nuts. Do not tighten the screws and the nuts yet.

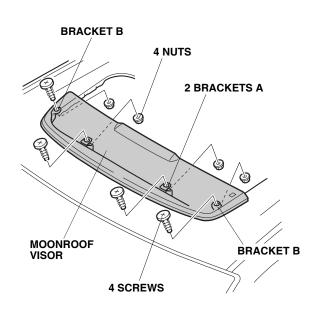


14. Adjust the position of the moonroof visor. Check that the brackets A and brackets B are firmly secured. Make sure the rubber molding on the moonroof visor is not twisted or rolled under the visor, and unfold if necessary.

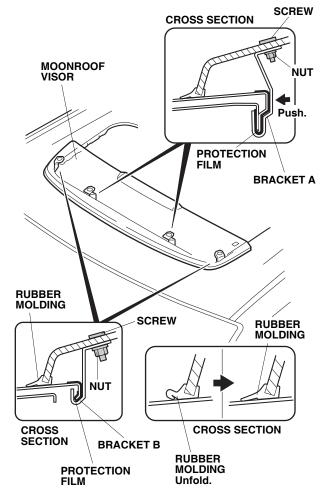

- 15. Tighten the screws and nuts while applying pressure against two brackets A. Make sure that there is no clearance between the brackets and the visor but do not overtighten the screws. Torque the screws and nuts: 2 N·m (1.5 lbf·ft)
- 16. Remove the masking tapes and the shop towels.

17. Remove one IMPORTANT INFORMATION label from the moonroof visor.

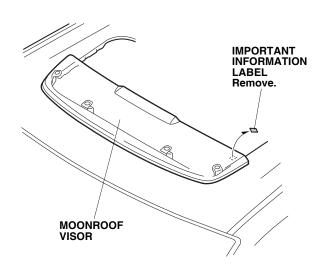

CARE OF THE MOONROOF VISOR

- To avoid damaging the surface, never use ammonia-based cleaners or solvents to clean the moonroof visor.
- Clean with a solution of mild dishwashing soap and a soft cloth or chamois.
- To remove scratches and restore the original luster, use Meguiar's Mirror Glaze plastic cleaner and polish or an equivalent high-quality plastic cleaner.