

PARTS LIST

Left roof rail base



Right roof rail base



Left roof rail cover



Right roof rail cover



8 TORX nuts, 8 mm



6 TORX nuts, 6 mm



2 TORX screws



Left tailgate hinge cover



Right tailgate hinge cover

**TOOLS AND SUPPLIES REQUIRED**

Ratchet

12 mm Socket

Torque wrench

Ruler

T-15, T-30, and T-40 TORX bits


Eye protection (face shield, safety goggles, etc.)

Reciprocating saw (air saw) with 32 tpi blade

The following tool is available through the Honda Tool and Equipment Program. On the iN, click on: Service > Service Bay > Tool and Equipment Program, then enter the number under "Search". Or, call 888-424-6857.

- Plastic trim tool (T/N SILTRIMTL10)

Illustration of the Roof Rails on the Vehicle

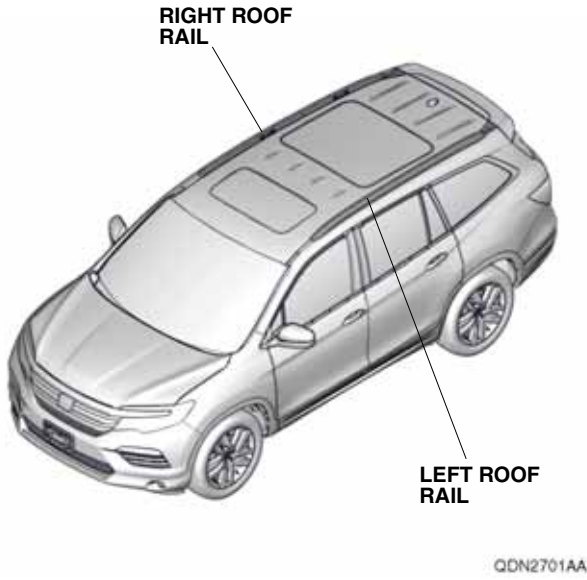


INSTALLATION


Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by “do-it-yourselfers.”

NOTE: Be extremely careful not to damage the roof and other surfaces of the body when installing the roof rails.


1. Remove the left roof molding.

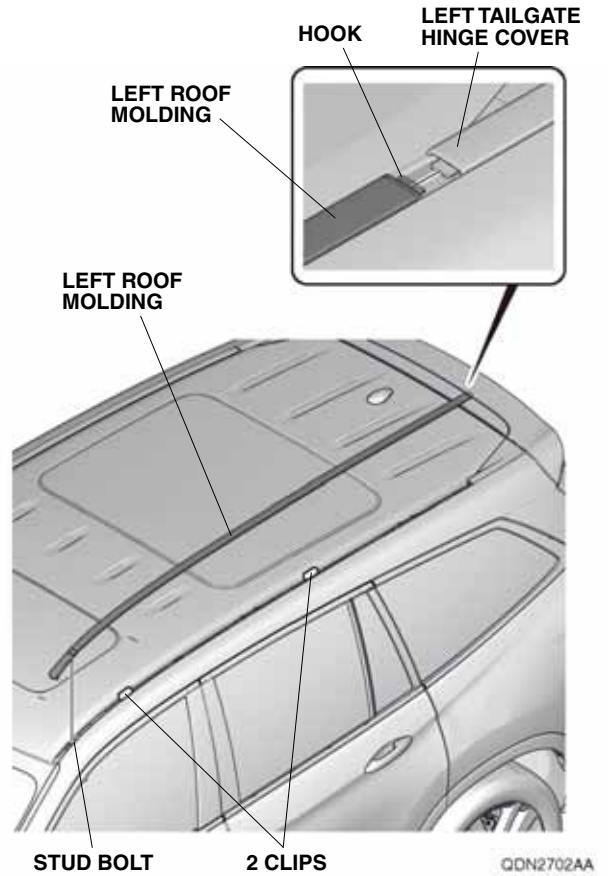


- Open the tailgate. Using a plastic trim tool, release the left tailgate hinge cover extension.
NOTE: Do not remove the tailgate hinge cover extension.

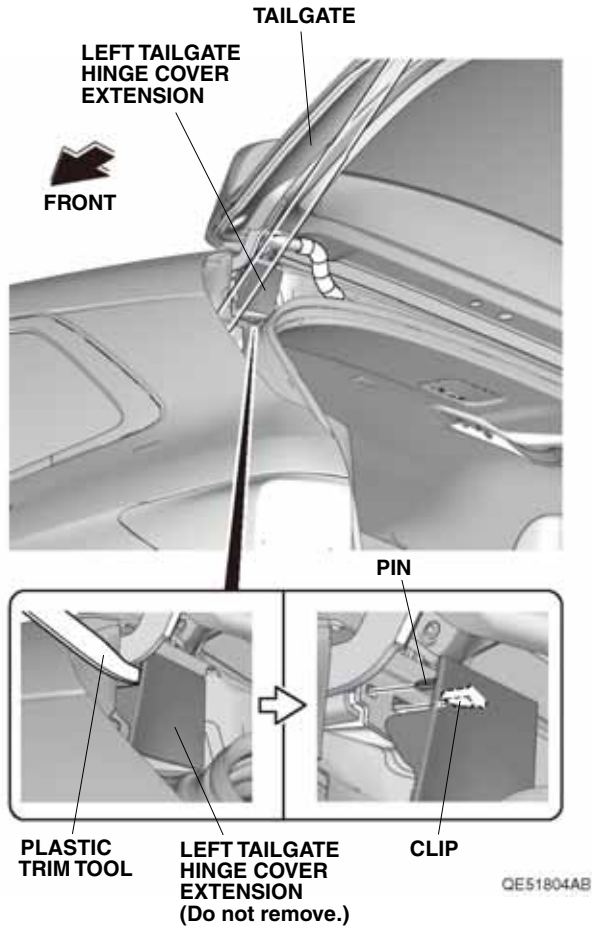


- Close the tailgate halfway. Gently pry up on the rear edge of the left tailgate hinge cover. Do not reuse the left tailgate hinge cover.

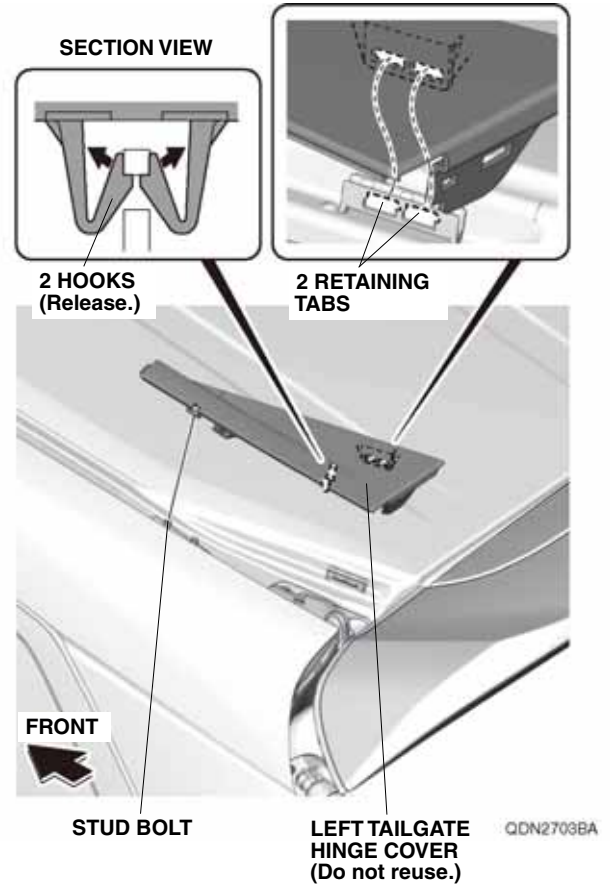


- Remove and discard the two clips from the two stud bolts on the roof.

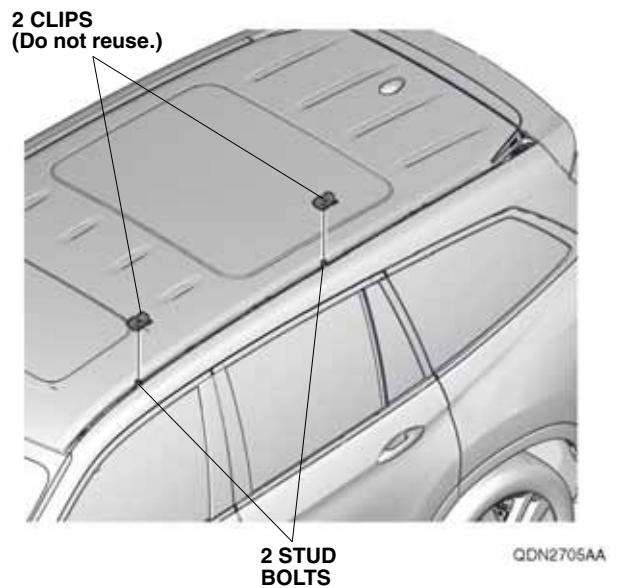


5. Install the left tailgate hinge cover onto the stud.

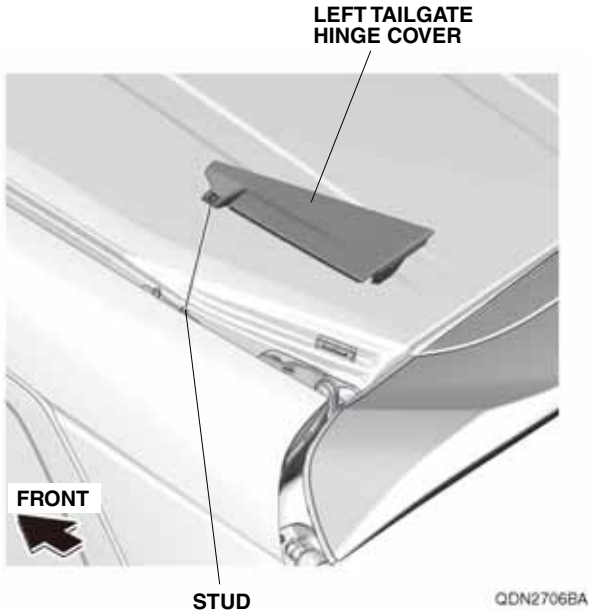


6. Open the tailgate. Install the left tailgate hinge cover extension on the left tailgate hinge cover with one clip and one pin.

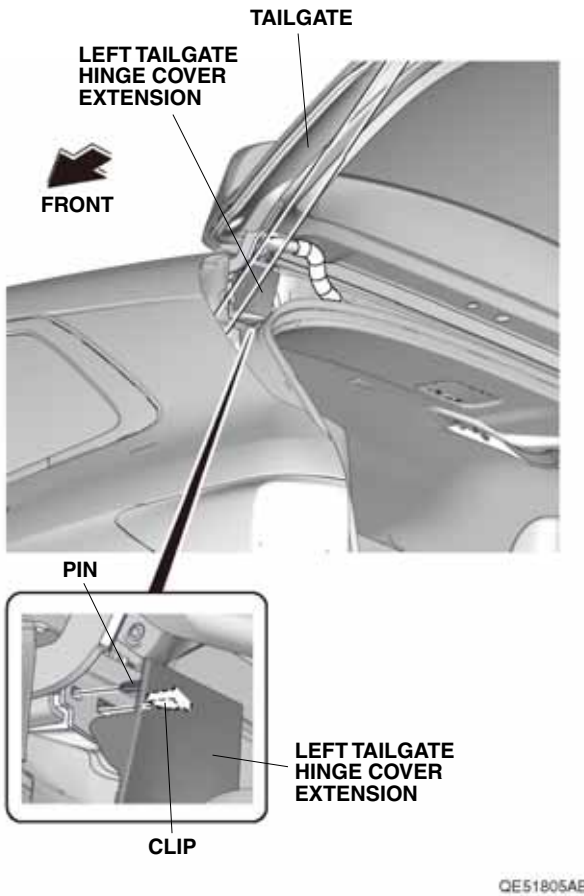


7. While wearing eye protection, use a reciprocating saw to cut the left roof molding at the measurement shown.

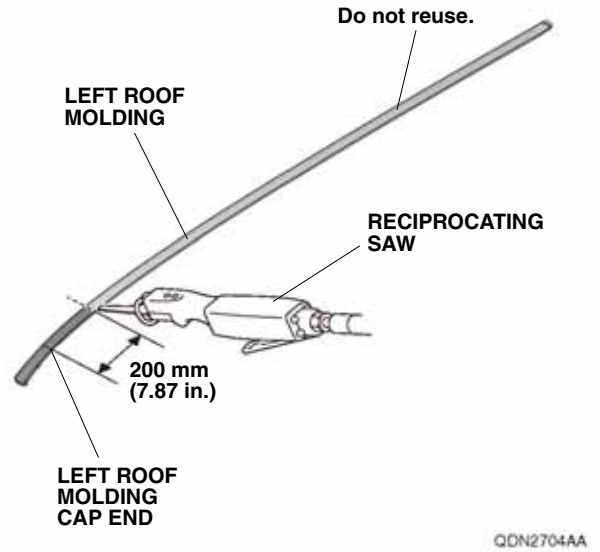


8. Install the left roof molding onto the stud.

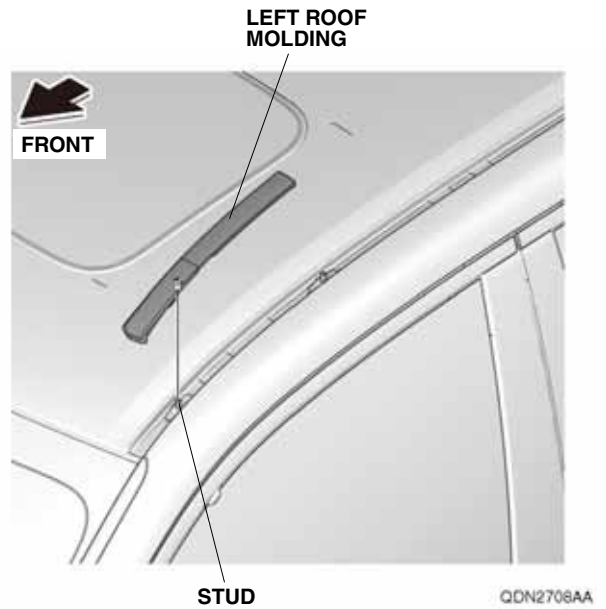


- Install the left roof rail base to the three stud bolts with three 6 mm TORX nuts. Make sure the roof rail base is installed in the correct position. Torque the 6 mm TORX nuts to 6.9 - 11.8 N·m (5.1 - 9 lb·ft).

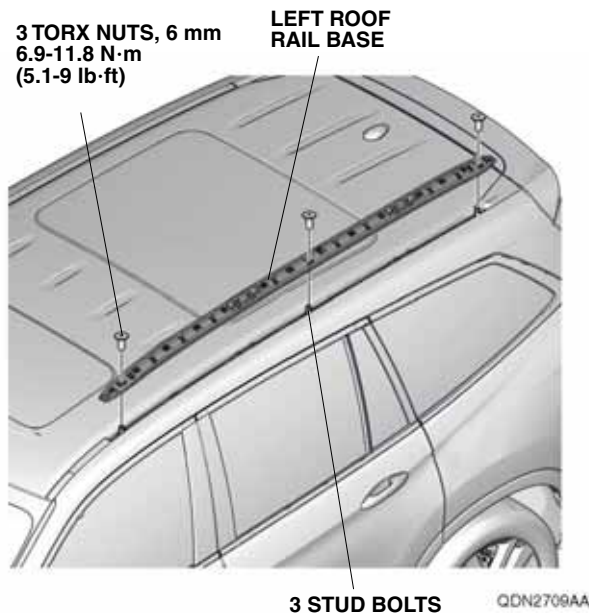

- Secure the left roof rail base to the four stud bolts with four 8 mm TORX nuts. Torque the 8 mm TORX nuts to 18.6 - 24.5 N·m (14 - 18 lb·ft).

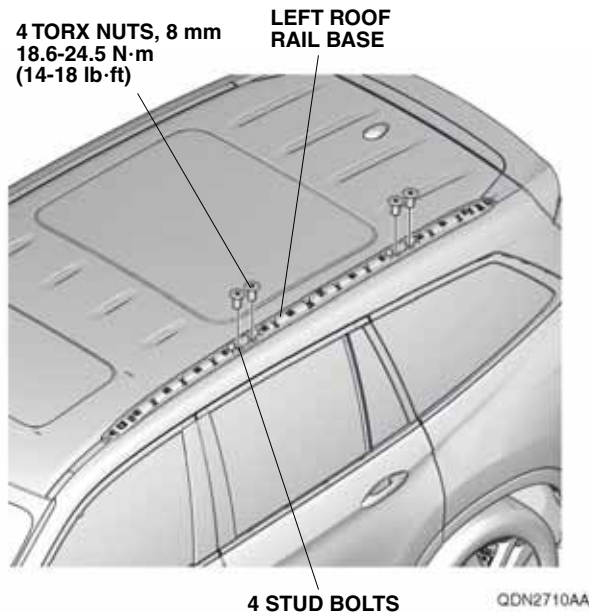

- Install the left roof rail cover on the left roof rail base with fourteen clips from the left roof rail cover.

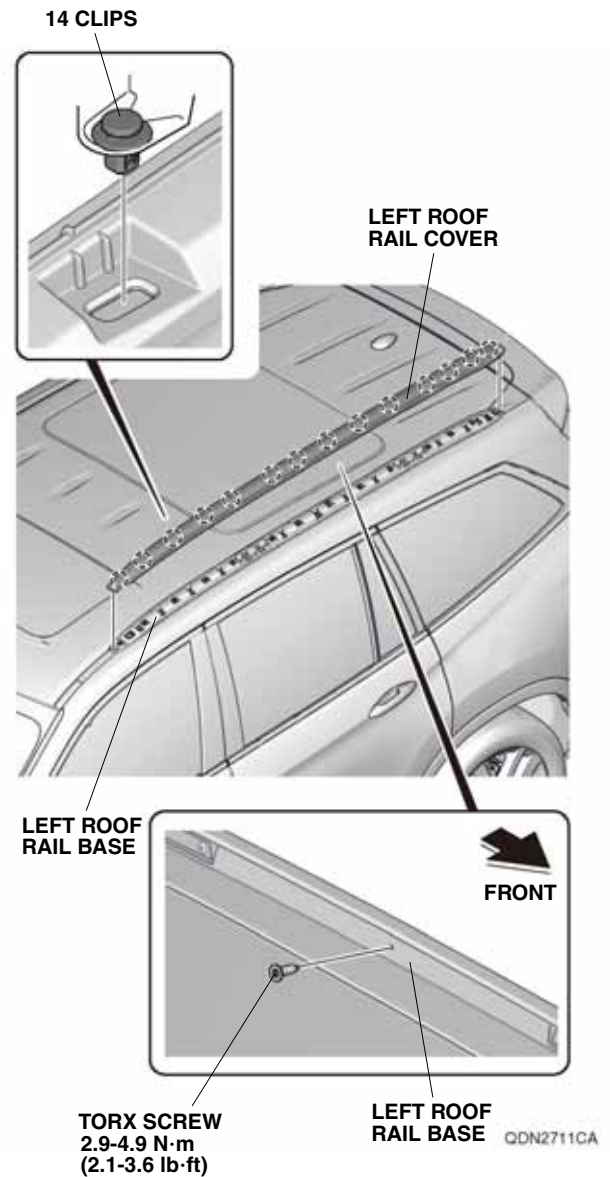

- Secure the left roof rail cover to the left roof rail base with one TORX screw. Torque the TORX screw to 2.9 - 4.9 N·m (2.1 - 3.6 lb·ft).
- Repeat steps 1 through 12 to install the right roof rail on the right side of the vehicle.