

- HONDA - INSTALLATION	Accessory WOOD GRAIN TRIM KIT	Application 2009 ODYSSEY (EXCEPT LX)	Publications No. All 40238
INSTRUCTIONS	(DASHBOARD)		Issue Date AUG 2008
PARTS LIST	2.	Remove the interior light sw transfer the switch to the wo	
Wood-grain center panel		panel.	
Wood-grain switch panel			
Wood-grain console lid panel			
SUPPLIES REQUIRED Shop towel		DASHBOARD CENTER PANEL	SCREWS (reused)
Masking tape			
KTC trim tool set, T/N SOJATP20	14		
 Starting near the select lever, gently pry up on the dashboard center panel to release the nine clips. Disconnect the vehicle connectors, and remove the dashboard center panel. 			INTERIOR LIGHT SWITCH (reused)
VEHICLE 9 CLIPS CONNECTOR	VEHICLE		
DASHBOARD CENTER PANEL VEHICLE	INSTRUMENT	WOOD-GRAIN CENTER PANEL	ũ

3. Remove the driver's center vent (four screws), and transfer the center vent to the wood-grain center panel.

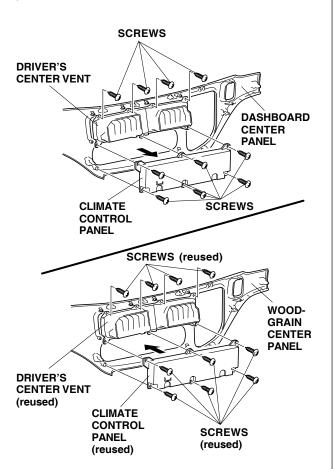


4. Remove the climate control panel (six screws), and transfer the control panel to the wood-grain center panel.


5. Plug in the vehicle connectors, and install the wood-grain center panel to the dashboard.

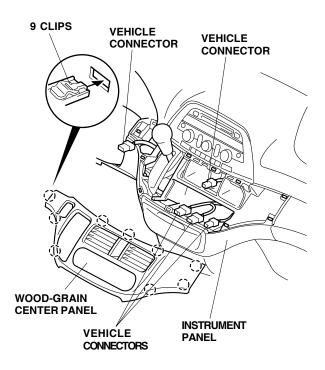

6. Remove the driver's dashboard switch panel (four clips), and unplug the vehicle connectors.



7. Remove the switch assembly (four screws), and transfer the switch assembly to the wood-grain switch panel.

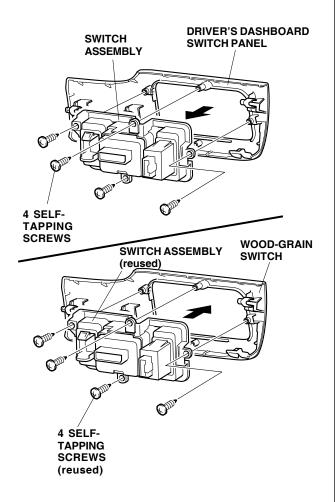

8. Plug in the vehicle connectors, and install the wood-grain switch panel.

